



MIL-C-5015 2 pin mating cable (For 310 series)

Electrical



CAPACITANCE (CONDUCTOR TO CONDUCTOR)@1kHz.....	19pF/ft
CAPACITANCE (CONDUCTOR TO SHIELD)@1kHz.....	35 pF/ft
RESISTANCE (CONDUCTOR).....	0.04 Ω /ft
INSULATION RESISTANCE (@100Vdc)	>100 MΩ
INSULATION RESISTANCE @+85° C (@100Vdc).....	>10 MΩ

Features

- Easy plug and play
- Water proof
- Double shield
- Strong cable assembly
- Reliability connector

Physical

WEIGHT (CONNECTORS NOT INCLUDED)	11.4 Grams/ft
BEND RADIUS.....	10x Cable Diameter
CABLE PULL-OUT.....	20 lb
COUPLING TORQUE.....	1.5 (0.2) lb-in (Nm)
OPERATING TEMPERATURE.....	-40 to +85 ° C
SHOCK LIMIT.....	5000 g

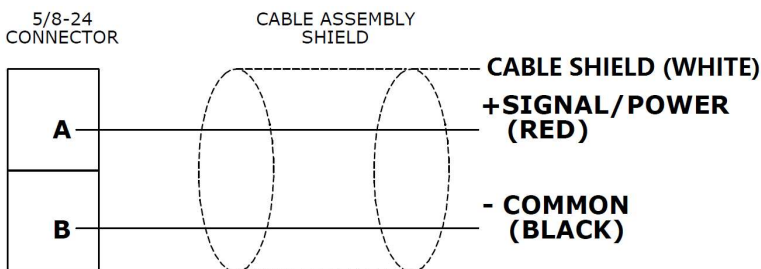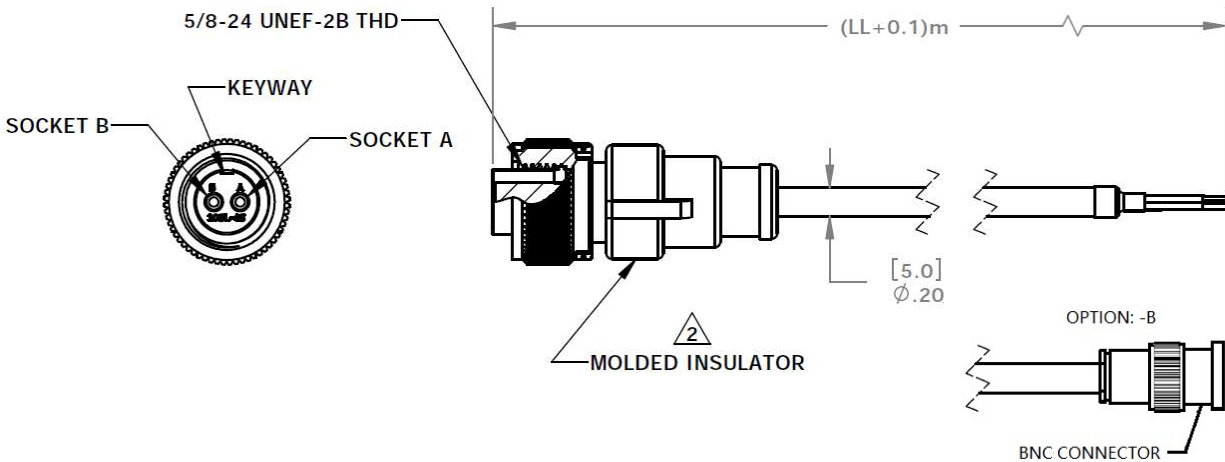

Ordering Information

