

## Temperature combined vibration sensor





### Features

- Temperature signal output
- Corrosion resistant
- Hermetic seal
- Case isolated
- EMI / RFI shielded
- Shock resistance




### Application

- Windmill machine
- Gear box monitoring
- Bearing detection
- Machine monitoring

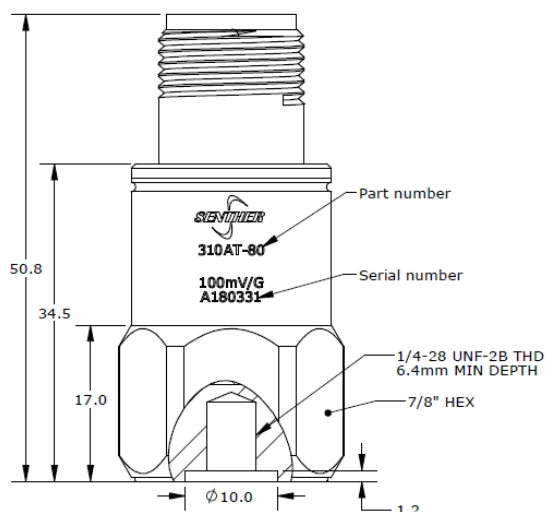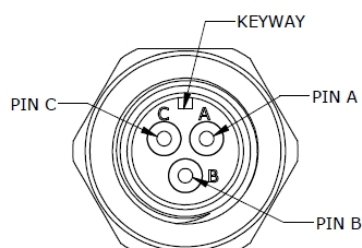

### Description

Model 310AT is an industrial IEPE accelerometer permitting simultaneous vibration and temperature measurements. 310AT features an annular shear ceramic crystal which exhibits excellent output stability over time. The accelerometer incorporates an internal circuit with in a two-wire IEPE system which transmits its low impedance voltage output through the same cable that supplies the constant current power. Integrated thermal sensor transfer the temperature output by voltage signal. Signal ground is internal shielded and isolated from the outer case of the unit. Polarity inversion protection for the amplify circuit is inherent in the circuit design. The welded stainless-steel construction provides a hermetic housing. The standard MIL-C-5015 glass insulated connector provides long-term stability over the operating temperature range. In addition to adhesive mounting, 310AT has 1/4-28 threaded holes for stud mounting on the test object. The 310AT provides wide frequency response and shock resistance, which is ideal for industrial vibration monitoring under incidental shock environment. Senter's model 20A-L is a MIL-C-5015 connector mating cable for the sensor.

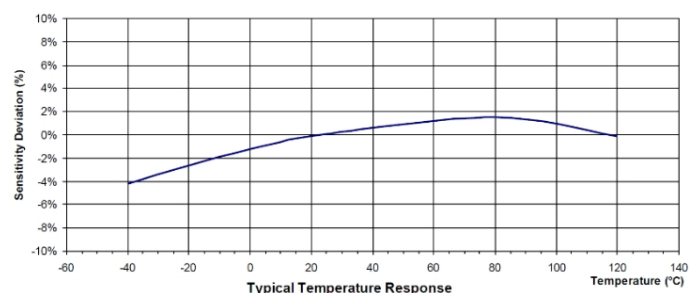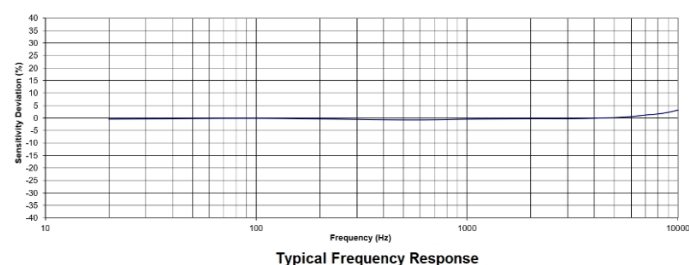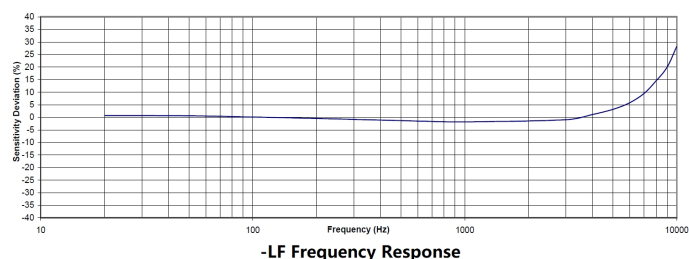

## Specification

Typical at +24°C (+75°F), 24Vdc, 4 mA and 100Hz, unless otherwise stated.

Part Number	310AT-5-LF	310AT-10-LF	310AT-20	310AT-80	310AT-80-1S	310AT-500	
Dynamic Range	±5	±10	±20	±80	±80	±500	g, peak
Sensitivity ±10%	1000	500	250	100	100	10	mV/g
Freq. Resp. ±5%	0.3-4000	0.3-4000	1-7000	1-7000	1-7000	1-7000	Hz
Freq. Resp. ±3dB	0.1-10000	0.1-10000	.3-15000	.3-15000	.3-15000	.3-15000	Hz
Resonant Frequency	20	20	32	32	32	32	kHz
Transverse Sensitivity	<5	<5	<5	<5	<5	<5	%
Temp. Resp., -55 to +125°C	±10	±10	±10	±10	±10	±10	%
Non-Linearity	±1	±1	±1	±1	±1	±1	%FSO
Residual Noise	0.0002	0.0002	0.0005	0.0005	0.0005	0.0010	g RMS
Shock Limit	2000	2000	5000	5000	5000	5000	g
Warm-up Time	<5	<5	<2	<2	<1	<2	second
Weight	87	87	80	80	80	80	Gram

Items	Standard	Units
Bias Voltage	10 to 14	Vdc
Supply Voltage	18 to 30	Vdc
Supply Current	2 to 10	mA
Output Impedance	<100	Ω
Case Insulation (@100Vdc)	>100	MΩ
Operating Temperature	-55 to +125	°C

### Temperature Sensor:

Items	Spec	Units
Output Sensitivity	10	mV/°C
Output Voltage at 0°C	500	mV
Accuracy	±1	°C
Range	-40 to +125	°C

### Physical:

Items	Spec	Units
Humidity	Hermetically Sealed	
Case Material	316L Stainless Steel	
Sensing Element	Piezo Ceramic (Shear)	
Connector	3 Pins MIL-C-5015	
Protection Grade	IP67	
Insulation Resistance (@500Vdc)	>200	MΩ
Operating Temperature	-40 to +125	°C



## Accessories

Calibration certificate included.

Part Number	Description	Availability
PM0011	Mounting stud ¼-28 to ¼-28 thread	One stud Included
PM0008	Mounting stud ¼-28 to M6 thread	
PM0007	Mounting stud ¼-28 to M10 thread	
PM0445	Adhesive mounting adapter	Optional
MB0001	Flat bottom magnet mounting adapter	Optional
MB0011	Saddle-shaped magnet mounting adapter	Optional
20A-10	10 meter mating cable with MIL-C-5015 3pins connector	Optional
IN-03	3 channels IEPE signal conditioner	Optional
IN-91	Portable vibration analyzer	Optional
IN-3062	8 channels data acquisition system	Optional

## Measurement configuration

Sensor	Mating cable	Signal conditioner	BNC cable	Data acquisition	Computer
					

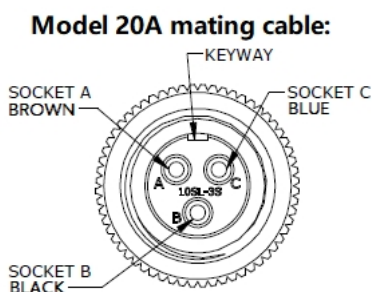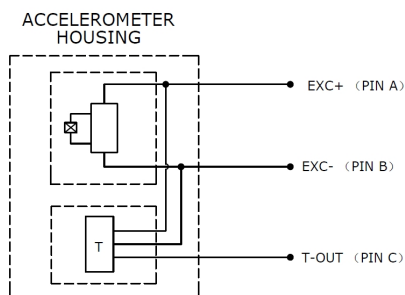

## Ordering information

310	A	-	80	-	LF	-	A
Model	Output signal	-	Range	-	Low frequency option	-	Mounting stud
310	A=IEPE output T=Temperature signal output	-	5=5g 10=10g 20=20g 80=80g 500=500g	-	LF= Low frequency response EF= 15KHz extend frequency Blank= Standard FR	-	A= ¼-28 to ¼-28 thread B= ¼-28 to M6 metric thread C*=Special

